


wineo 300 medium
Direct Pressure Laminate flooring according to EN 13329 for glueless installation



	wineo 300 medium	wineo 300 medium with integrated insulation mat Noise-Reduct Basis
Format	1288 x 195 mm	1288 x 195 mm
Product thickness	7 mm	9 mm
Panels / m² per box	10 / 2.51 m²	8 / 2.01 m ²
Boxes / m² per pallet	52 / 130.52 m²	52 / 104.52 m ²
Guarantee	15 years – Guarantee for private use according to Windmüller warranty conditions – www.wineo.de	

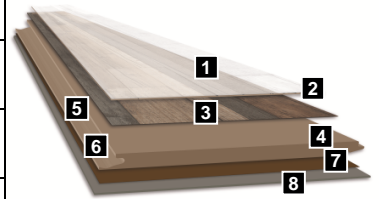

Classification		Product composition	
Utilization class 23 Heavy-duty use in the domestic area EN ISO 10874	Corridors, living rooms, kitchens, home offices	1	Surface texture various embossings
Utilization class 31 Medium use in the commercial sector EN ISO 10874	Hotel rooms, small offices	2	Wear layer Melamine resin overlay
AC3 Abrasion resistance EN 13329, annex E	AC3	3	Decor Decor paper
Impact resistance EN 13329, annex H	IC1	4	Core board HDF-Protect®
Reaction to fire EN 13501-1	C _{fl} - s1	5	Profile connection LocTec® technology
Slip resistance EN 13893	μ ≥ 0.30 - DS	6	Profile seal
Anti-static properties EN 1815	≤ 2 kV	7	Backing Melamine resin
Resistance to staining EN 438-2	Group 1 + 2: ≥ grade 5 Group 3: ≥ grade 4	8	Integrated insulation mat Noise-Reduct Basis
Light fastness EN ISO 105-B02	Blue wool scale: ≥ 6 Grey scale: ≥ 4	Certifications	
Residual indentation EN ISO 24343-1	≤ 0.01 mm - no visible change	windmüller flooring products WFP GmbH Nord-West-Ring 21 D-32832 Augustdorf Laminatfußboden DOP: 0101001 EN 14041:2004 Laminate Flooring to be used within a building.	
Effect of a furniture leg EN 424	Foot type 0 - no visible damage		
Castor chair test EN 425 / ISO 4918	Type W - no visible change		
Thermal resistance EN 12667	< 0.06 (m ² K)/W without insulation mat < 0.07 (m ² K)/W with integrated insulation mat Noise-Reduct Basis	windmüller flooring products WFP GmbH Z-156.606-410 Emissionsgeprüftes Bauprodukt nach DIN EN 15650 EMISSIONS DANS L'AIR INTÉRIEUR A+ Information représentative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (faibles émissions) à A+ (très faibles émissions)	
Noise-Reduct Basis Impact sound reduction EN ISO 10140-3	~ 18 dB with integrated insulation mat Noise-Reduct Basis	ACE BLAUE ENGEL www.ambisverband.de PEFC Förderung nachhaltiger Waldwirtschaft www.pefc.de	
E1 Formaldehyde emission EN 717-1	E1		
Disposal	<u>Private:</u> like laminated furniture; possible with normal domestic refuse <u>Commercial:</u> Refuse-key-no. AVV 170201		

Relevant Information:

- Underfloor heating: In conjunction with suitable underlay material, suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.
- Cleaning and care: see separate cleaning & care instruction.
- No approval for gluing over the whole area without an integrated insulation mat.
- Gluing over the whole area with an integrated insulation mat only after consultation with the application technology department at windmüller flooring products WFP GmbH.
- Technical subjects can be changed by windmüller flooring products WFP GmbH.