


**wineo 550**  
Laminate flooring with an ESH Lacquering

**wineo**

	wineo 550 matt / high gloss
<b>Format</b>	853 x 331 mm
<b>Product thickness</b>	8 mm
<b>Panels / m<sup>2</sup> per box</b>	8 / 2.26 m <sup>2</sup>
<b>Boxes / m<sup>2</sup> per pallet</b>	45 / 101.70 m <sup>2</sup>
<b>Guarantee</b>	20 years – Guarantee for private use according to Windmüller warranty conditions – www.wineo.de

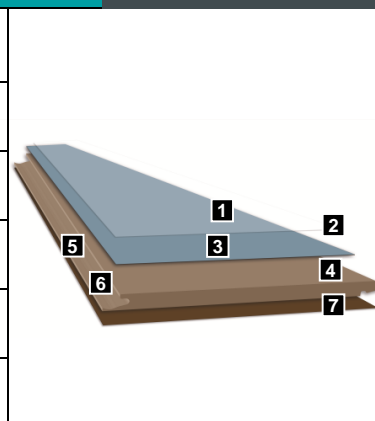

Classification		Product composition	
<b>Utilization class 23</b> Heavy-duty use in the commercial area EN ISO 10874	Corridors, living rooms, kitchens, home offices	1	<b>Surface texture</b> matt and high gloss finishes
<b>Utilization class 32</b> Normal use in the commercial sector EN ISO 10874	Offices, boutiques, cafés	2	<b>Wear layer</b> Top coat
<b>AC4</b> Abrasion resistance EN 13329, annex E	AC4	3	<b>Decor</b> Decor varnish
<b>Impact resistance</b> EN 13329, annex H	IC2	4	<b>Core board</b> Aqua-Protect®
<b>Reaction to fire</b> EN 13501-1	C <sub>fl</sub> - s1	5	<b>Profile connection</b> LocTec® Technologie
<b>Slip resistance</b> EN 13893	μ ≥ 0.30 - DS	6	<b>Profile seal</b>
<b>Anti-static properties</b> EN 1815	≤ 2 kV	7	<b>Backing</b> Kraft paper
<b>Resistance to staining</b> EN 438-2	Group 1 + 2: ≥ grade 5 Group 3: ≥ grade 4		
<b>Light fastness</b> EN ISO 105-B02	Blue wool scale: ≥ 6 Grey scale: ≥ 4	<b>Certifications</b>	
<b>Residual indentation</b> EN ISO 24343-1	≤ 0.01 mm - no visible change	windmüller flooring products WFP GmbH Nord-West-Ring 21 D-32832 Augustdorf Laminatfußboden DOP: 1601001 EN 14041:2004 Laminate Flooring to be used within a building.	
<b>Effect of a furniture leg</b> EN 424	Foot type 0 - no visible damage		
<b>Castor chair test</b> EN 425 / ISO 4918	Type W - no visible change		
<b>Thermal resistance</b> EN 12667	< 0.06 (m <sup>2</sup> K)/W		
<b>E1</b> Formaldehyde emission EN 717-1	E1		
<b>Disposal</b>	<u>Private:</u> like laminated furniture; possible with normal domestic refuse <u>Commercial:</u> Refuse-key-no. AVV 170201	windmüller flooring products WFP GmbH Z-156.606-708 Emissionsgeprüftes Bauprodukt nach DIBt-Grenzwerten	

**Relevant Information:**

- Underfloor heating: In conjunction with suitable underlay material, suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.Cleaning and care: see separate cleaning & care instruction.
- No approval for gluing over the whole area without an integrated insulation mat.  
Gluing over the whole area with an integrated insulation mat only after consultation with the application technology department at windmüller flooring products WFP GmbH.
- Technical subjects can be changed by windmüller flooring products WFP GmbH.